


TURBO




CE IPX4 T 40   

POSITION



DUCT MOUNTING

DIMENSIONS

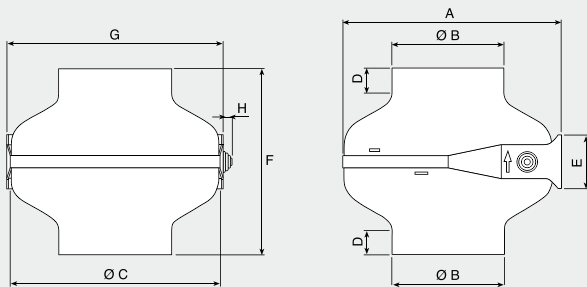

Model	A	ØB	ØC	D	E	F	G	H	kg
100 ES	287	98	275	17	70	242	282	12	3
100	287	98	275	17	70	242	282	12	3
125 ES	287	123	275	24	70	242	282	12	3
125	287	123	275	24	70	242	282	12	3
150 ES	287	148	275	32	70	242	282	12	3
150	287	148	275	32	70	242	282	12	3
160 ES	287	158	275	35	70	242	282	12	3
160	354	158	345	24	84	272	345	12	5,5
200 ES	354	198	345	34	84	272	345	12	4
200	354	198	345	34	84	272	345	12	5,5
250	354	248	345	48	84	272	345	12	5,5
315 ES	354	313	345	48	84	272	345	12	5,5
315	354	313	345	48	84	272	345	12	6

TURBO

In Line centrifugal high performances fans to convey air or fumes through ducts.

- Suitable for domestic, commercial and industrial environments;
- Max temperature of extracted air: 55°C;
- The range is composed by 13 models in standard version with high performances and in ES version with reduced noise level and energy consumption;
- Ball bearing motor protected by a non self resetting thermal cut-out
- Zinc plated steel frame, high resistance motor support with incorporated airflow fins;
- Integrated mounting bracket for easy and quick installation;
- Holes provided in the bracket allow mounting with cords;
- Electrical box IP54 protected;
- Product IPX4 protected;
- Double insulated product, without ground wire for fast connection;
- In accordance with EN 60335-2-80;
- Motor speed can be regulated through optional controller.

Accessories: [See dedicated section](#)

ENVIRONMENTS APPLICATION



Suitable for domestic, commercial and industrial environment such as:

- Bathroom
- Kitchens
- Offices
- Factories
- Shops
- Gymnasiums
- Bars & Restaurants

TECHNICAL DATA

Model	Code	duct Ø mm	Voltage at	Max flow rate m ³ /h	Max Press		Rated power W	Nom. curr. in A 230 V	dB(A) 3m	RPM	Kg
					mm H ₂ O	Pa					
TURBO 100 ES	0037100	100	220-240 - 50 Hz	210	30	294	40	0,25	45	2000	3,0
TURBO 100	0037000	100	220-240 - 50 Hz	270	30	294	60	0,35	53	2600	3,0
TURBO 125 ES	0037400	125	220-240 - 50 Hz	290	29	285	40	0,25	45	1850	3,0
TURBO 125	0037300	125	220-240 - 50 Hz	400	29	285	60	0,38	52	2530	3,0
TURBO 150 ES	0037700	150	220-240 - 50 Hz	370	27	265	40	0,25	42	1850	3,0
TURBO 150	0037600	150	220-240 - 50 Hz	500	29	285	60	0,38	52	2530	3,0
TURBO 160 ES	0037800	160	220-240 - 50 Hz	540	28	275	60	0,38	52	2500	3,0
TURBO 160	0037900	160	220-240 50/60 Hz	710	37	363	90	0,43	56	2500	4,5
TURBO 200 ES	0038000	200	220-240 50/60 Hz	730	30	294	90	0,42	56	2550	4,5
TURBO 200	0038100	200	220-240 50/60 Hz	1050	55	540	180	0,78	58	2550	5,5
TURBO 250	0038300	250	220-240 50/60 Hz	1200	56	549	180	0,78	59	2590	5,5
TURBO 315 ES	0038500	315	220-240 50/60 Hz	1250	50	490	180	0,78	59	2600	5,5
TURBO 315	0038400	315	220-240 50/60 Hz	1400	65	638	280	1,24	60	2500	6,0

