


THERMAL RANGE OF APPLICATION
 THERM. ANWENDUNGSBEREICH : -40° C ... +80° C ✓
 APPLICATION THERMIQUE
 CAMPO DI APPLICAZIONE TERMICA

WORKING PRESSURE
 BETRIEBSDRUCK : MAX. 5,3 bar ✓
 PRESSION DE SERVICE
 PRESSIONE DI SERVIZIO

MEDIUM: AIR
 MEDIUM: LUFT ✓
 FLUIDE: AIR
 FLUIDO: ARIA

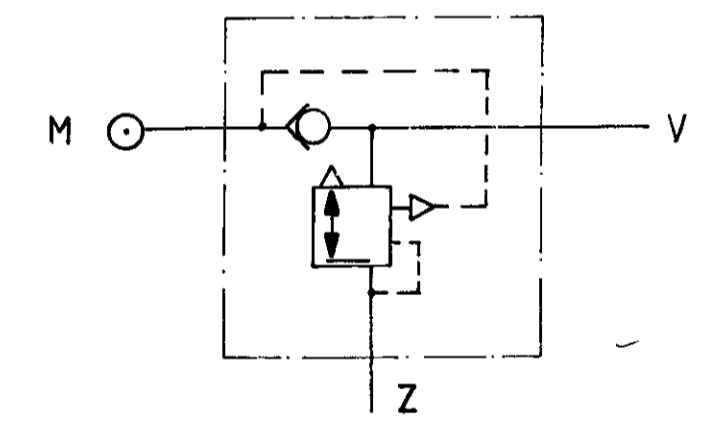

- M TOWING VEHICLE
MOTORWAGEN
VEHICULE TRACTEUR
VEICOLO TRATTORE
- V RESERVOIR
VORRATSBEHAELTER
RESERVOIR
SERBATOIO
- Z CYLINDER
ZYLINDER
CYLINDRE
CILINDRO

16 803	J	DATE	77-01-18	SIGNATURE	WABCO WESTINGHOUSE RELAY EMERGENCY VALVE VALVE RELAIS D'URGENCE SERVODISTRIBUTORE ANHAENGER - BREMSVENTIL
	H	DRAWN		<i>Schücker</i>	
	F	CHECKED	78-02-25	<i>Klein & Kuhn</i>	
	E	DATE	77-01-18		
	D	STANDARDIZATION	78-08-17		
	C	MASS	0,9 kg	SCALE	1:1
	B	SIZE	A 2	Y R L	140
	A	IDENTIFICATION CODE	471 003 020 0		
		CODE FOR FUNCTION		CODE FOR SHAPT	605

COPYRIGHT BY WABCO WESTINGHOUSE GMBH HANNOVER