

# CONTI® SYNCHROFLEX GEN III


PU heavy-duty timing belt for high power transmission at high speeds

## Properties:

- Temperature range, depending on application, from -30 °C to +100 °C (please request technical advice for range under -10 °C and above +50 °C)
- Up to 25% higher power transmission
- Constant length
- Low-noise
- Wear-resistance
- High flexibility
- Resistant to oils, grease and fuel
- Conditionally resistant to acid and lye
- Raw materials and production are silicone free
- Suitable for tropical climates
- Aging-resistant
- Maintenance-free



## Belt structure:

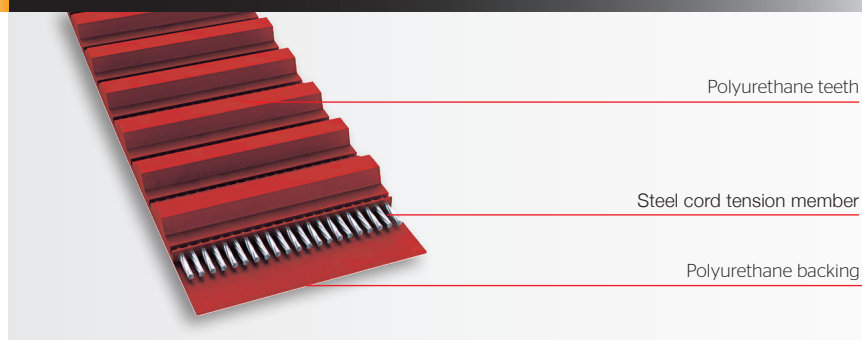


On request.

## Profile

AT 3
AT 5
AT 10
AT 20

## Comparison of products:

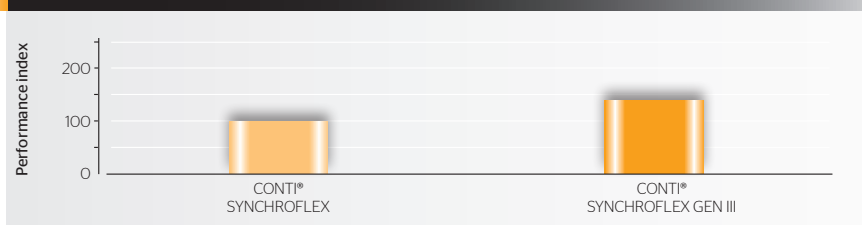

For our **CONTI® SYNCHROFLEX GEN III Polyurethane timing belts** we take advantage of **Mulco group's** sales partners network and their competence in the development of customised drives for the fields of transport technology, linear drive applications and power transmission technology.

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)

## Power Transmission Group

ContiTech Antriebssysteme GmbH  
D-30169 Hannover · Phone +49 511 938 - 71  
[industrie.as@ptg.contitech.de](mailto:industrie.as@ptg.contitech.de)