

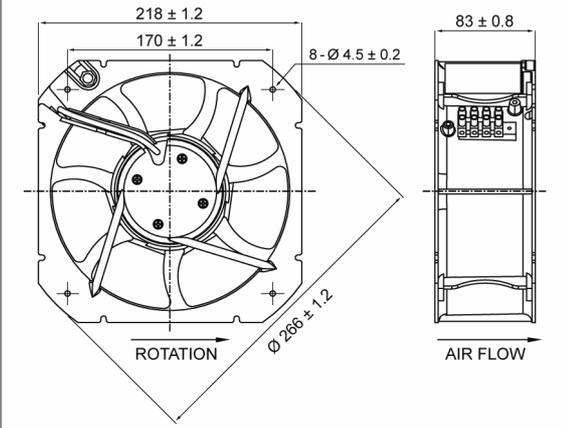


"C22SU" SERIES FANS

Description: **Axial fan a.c. 218X218X83mm**

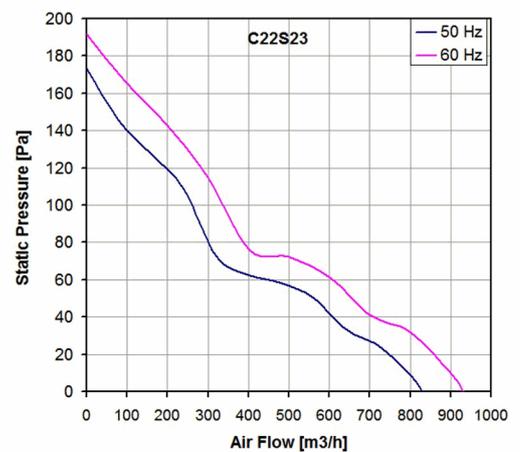

- Fan material:** casing of aluminium alloy die casting and fibre reinforced plastic (PA 6/6) impeller
- Casing material:** aluminium UNI5076
- Fixing system:** No 4 holes Ø4.5
- Motor protection:** thermally
- Rated temperature range:** from -25°C to +70°C
- Motor Lifetime L10 at 25°C (approx.):** 63,000 h
- Working class of capacitor:** class B
- Electrical connection:** by terminal block 3 pins (L-N-PE)
- Weight:** 1,910 kg
- Category:** capacitor run external rotor
- Approvals:** CE, UL E223195

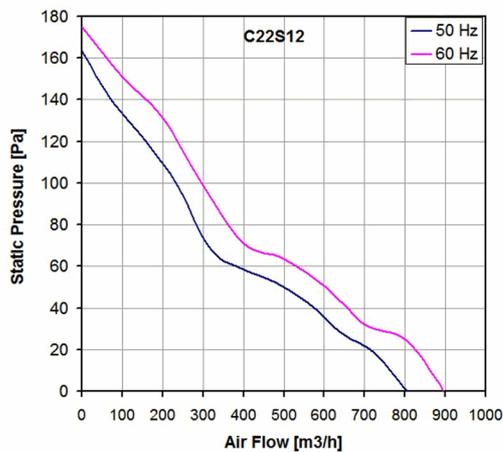

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
C22S12HKBU00	Ball	115 V a.c.	50/60	0.60/0.65	68/70	800/895	163/175	64.6/67.4	2,193/2,377	CE; cURus
C22S23HKBU00	Ball	230 V a.c.	50/60	0.32/0.38	70/85	837/937	173/192	65.0/68.0	2,232/2,461	CE; cURus

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.